

## CO INSPECTIONS

### Residential and Commercial Construction


The following is a list of what the Water and Wastewater Board of the City of Madison will inspect for the release of a Certificate of Occupancy (CO) on all Construction Sites.

- Box installed at proper ground level.
- Service meter is inside box at proper depth and centered.
- If pressure regulator is outside the easement area. (Should be installed per City of Madison guidelines) [CLICK HERE](#)
- Fire Hydrants at proper ground level.
- Water valves at proper ground level.
- Sewer cleanout properly installed with cap.

NOTE: Sewer service line connection will be TVI Inspected on a random basis.

If a CO is being held up due to any of the above items A cash bond can be posted for the release of the CO. The cash bond will be held by the Board and returned to The contractor when the repairs are made.

Sewer clean outs that are within 3 ft. of building foundation are not required to have reinforcement material around the PVC pipe.

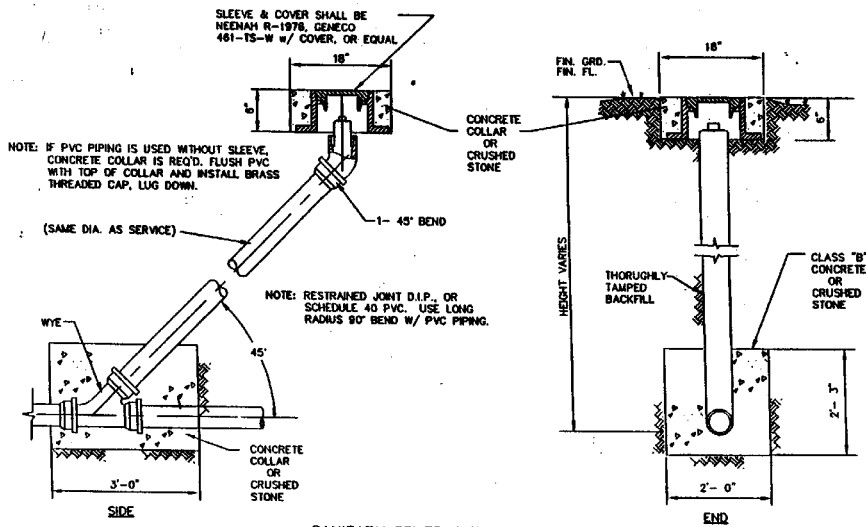

SANITARY SEWER CLEAN-OUT  
NTS

MADISON WATER & WASTEWATER BOARD			
STANDARD DETAILS			
SANITARY SEWER CLEANOUT			
RESIDENTIAL			
JANUARY 2001		STANDARD	8.361
NO. DATE APPD		DESCRIPTION	APPROVED BY
1	5/99	ADD SCHEDULE 40 PIPE	<i>[Signature]</i>
REVISIONS			